



WDC Kitchen & Bath Center
78740 CA-111
La Quinta, CA 92253
(760) 238-5160

PREPARED FOR

Dantor Construction
46860 Armin Dr.
Palm Desert, CA 92260

Quotation

DATE PREPARED	EXPIRATION DATE
08/21/2024	
PREPARED BY	
Matt Pratchard Builder Sales Advisor mattp@wdcappliances.com 760-238-5160 x1306	
ID: TECGAY-1162596	

Freeman Residence: Monogram

			PROJECT		
Primary Kitchen			QTY	UNIT PRICE	EXT. PRICE
	Monogram : ZIP364IPV11 36" Width 20.8 Cuft Custom Or SS Panel Panel Ready Finish 3-4 Week Lead Time		1	\$9,120.20	\$9,120.20
	Monogram : ZK4SN360VSS 36 Inch Stainless Steel Panel Kit Stainless Steel Finish 4-5 week lead time		1	\$840.20	\$840.20
	Monogram : ZKS4H4PVSS Single Door Refrigerator - Statement Handle Kit Stainless Steel Finish 2-3 week lead time		1	\$440.20	\$440.20
	Monogram : ZGP366NTSS 36" All Gas Professional Range With 6 Burners (Natural Gas) Stainless Steel Finish 2-3 week lead time		1	\$5,680.20	\$5,680.20
	Zephyr : DVL-E42ASSX Vista Island 42in, SS, BODY ONLY Stainless Steel Finish ETA 4 Week Lead time		1	\$2,160.00	\$2,160.00
	Zephyr : CBI-600A Blower, Internal, 600 CFM Black Finish 2-3 week lead time		1	\$215.00	\$215.00

PROJECT

Primary Kitchen Continued...



Monogram : ZDT985SPNSS
 Monogram Smart Fully Integrated Dishwasher
 Stainless Steel Finish
 2-3 week lead time

QTY	UNIT PRICE	EXT. PRICE
1	\$1,920.20	\$1,920.20



Monogram : ZWL1126SRSS
 1.2 Cu. Ft. Drawer Microwave
 Stainless Steel Finish
 Lead Time 2-3 weeks

1	\$1,520.20	\$1,520.20
---	------------	------------



Miele : CVA7445CTS
 CVA 7445 - 24" PureLine Coffee Plumbed DirectSensor (Clean Touch...
 Clean Touch Steel Finish
 2-3 week lead time

1	\$5,199.00	\$5,199.00
---	------------	------------

PRIMARY KITCHEN SUB TOTAL:	\$27,095.20
----------------------------	-------------

Laundry



LG Appliances : WKGX201HBA
 4.5 cu.ft. Washer, 7.4 cu.ft. Gas Dryer, Washtower with Center...
 Black Stainless Steel Finish
 3-4 week lead time

1	\$1,845.00	\$1,845.00
---	------------	------------

LAUNDRY SUB TOTAL:	\$1,845.00
--------------------	------------

GRAND SUB TOTAL:	\$28,940.20
Installation	\$1,535.00
Taxes:	\$2,242.87
TOTAL:	\$32,718.07

**MONOGRAM 36" PREMIUM FULLY INTEGRATED
FRENCH-DOOR BOTTOM FREEZER****ZIP364IPVII****BOTTOM FREEZER WITH FLUSH INSTALLATION**

Concealed hinge offers a look of seamless perfection that installs flush with surrounding cabinetry

6-TEMPERATURE SETTING CONVERTIBLE DRAWER

The convertible drawer with 6 temperature settings allows you to choose temperatures best suited for storing cold drinks, meat, snacks, ice cream, produce or frozen items

**STATEMENT AND MINIMALIST COLLECTION
REFRIGERATOR HANDLES (SOLD SEPARATELY)**

Designed to enhance choice and customization, Statement and Minimalist Collection refrigerators do not come with handles, these must be chosen separately and ordered through a Monogram representative

PANEL-READY EXTERIOR WITH SIX-WAY ADJUSTABILITY

Statement and Minimalist Collection refrigerators accept stainless steel panels, which can be ordered separately from Monogram or your cabinet maker

LED LIGHTING INSIDE REFRIGERATOR

Ramp-up LED interior lighting provides exceptional illumination throughout the fresh food compartment, accentuating the sophisticated interior and allowing you to easily see food in the refrigerator

REFRIGERATOR WITH INTERNAL WATER DISPENSER

The water dispenser on the inside of the refrigerator leaves the outside looking clean and uncluttered

REFRIGERATOR AIR FILTRATION ODOR REDUCING SYSTEM

The refrigerator deodorizer air filtration system helps keep your refrigerator fresh by scrubbing the air of food odors and gases

WIFI CONNECTED REFRIGERATOR

The WiFi refrigerator allows you to wirelessly control refrigerator settings from your smartphone, using an available app

REFRIGERATOR WITH RAMP-UP LED INTERIOR SHELVES

LED-lighted refrigerator shelves provide exceptional illumination throughout the refrigerator compartment, accentuating the sophisticated interior and making contents easy to see

REFRIGERATOR WITH ADJUSTABLE DOOR BINS

Finely crafted, adjustable aluminum door bins with glass accents offer easy access to beverages and quick-grab items

ACCURATE, ELECTRONIC TOUCH CONTROLS

Upfront, electronic touch controls make it easy to adjust climate settings to create ideal food storage conditions

REFRIGERATOR WITH SOFT-CLOSE

The innovative sliding mechanism helps the drawers close gently and completely

**HUMIDITY-CONTROLLED VEGETABLE DRAWERS
AND FRUIT DRAWER**

Enjoy additional storage flexibility that helps to preserve food freshness

FACTORY INSTALLED ICE MAKER

The water filtration system in the factory installed ice maker supplies you with clean, fresh-tasting water and ice

SABBATH MODE REFRIGERATOR

This refrigerator with Sabbath mode is designed to disable functions in accordance with Sabbath-observing practices

For questions about your appliance, please call 1-800-626-2000.

PAGE 1 OF 3

Product Specification Revised 10/22



SPECIFICATIONS

Overall Width	35 3/4" (90.8 cm)
Overall Height	83 7/8" (213 cm)
Overall Depth	24 3/4" (62.9 cm)
Door Clearance at 90°	see TOP VIEW **Dim A
Drawer Clearance	24 1/4" (61.6 cm)
Cutout Width	36" (91.4 cm)
Cutout Height	84" (213.4 cm)
Cutout Depth	25" (63.5 cm)
Net Weight (approx)	550 lbs (250 kg)



ATTENTION ELECTRICIAN:

A 115 volt 60Hz, 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. For multiple unit installation, each unit requires separate individually properly grounded circuit or breaker and separate properly grounded 3-prong electrical receptacle recessed.

WARNING:

When installing appliance, you must use and follow the product installation instructions. These can be found with unit or on web at monogram.com.

OVERALL DIMENSIONS

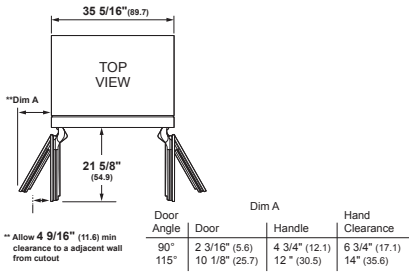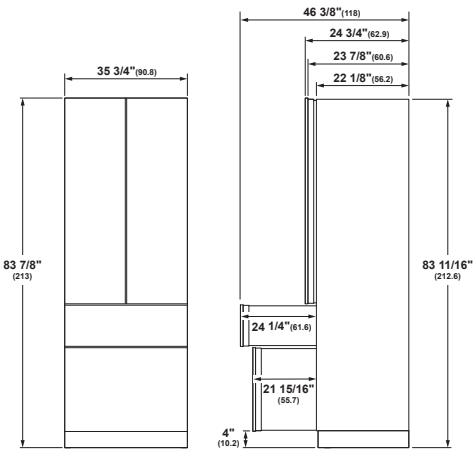


** Dimensions based on handle height of 2 9/16" (6.5)
** Measurement indicates Statement Handle type

Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.


For questions about your appliance, please call 1-800-626-2000.



SINGLE INSTALLATION

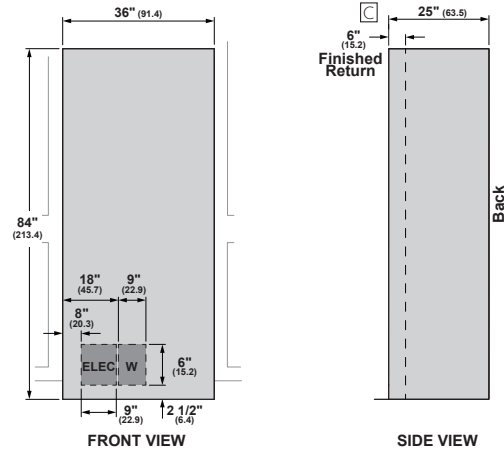

FLUSH 3/4" THICK PANEL DIMENSIONS SINGLE INSTALLATION

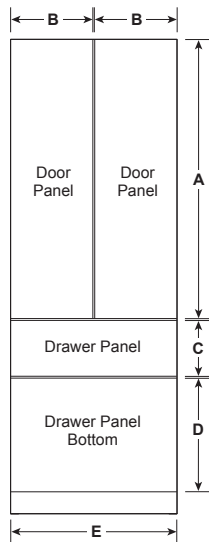

PANEL DIMENSIONS

A	B	C	D	E
49 3/8"	17 13/16"	9 11/16"	20 5/8"	35 3/4"

For questions about your appliance, please call 1-800-626-2000.

INTEGRATED INSTALLATION

HELPFUL TIPS

- ☐ A minimum 6" (15.2) finished return matching cabinet exterior recommended on interior on all sides and top at front of opening
- Trimmed refrigerators are designed to be customized with decorative panels. Field-installed 3/4" custom door panels are required.
- Maximum total panel weight:
Fresh Food Door- 20.7 lbs
Convertible Drawer - 7.5 lbs
Freezer Drawer - 17.1 lbs
Note: For panels constructed with rails and stiles (5-panel), the rails and stiles must be a minimum of 2" wide.
- For Custom Panels: Use templates provided with units to pre-drill holes for mounting panel brackets (provided with unit). Adjustment screws and instructions also provided with units.
- Custom Panels require a custom handle from cabinet maker or the ZKPN - Handle Mounting Kit, is required when using Statement and Minimalist handles (sold separately).
- Stainless steel handle and panel options:
ZK4SN360VSS: French Door Stainless Steel door panel kit
ZKSB4H4CVSS: Minimalist handle kit
ZKSB4H4PVSS: Statement handle kit

WARNING:

When installing appliance, you must use and follow the product installation instructions. These can be found with unit or on web at monogram.com.
This document is intended for cabinet and panel construction only.

MONOGRAM

Brand: Monogram
SKU: ZK4SN360VSS
Name: Single Door Refrigerator - Statement Handle Kit
Finish: Stainless Steel
UPC: 084691924609

PRODUCT DETAILS

ADDITIONAL PRODUCT INFORMATION

ZK4SN360VSS - Monogram

Product: 12560042 We are pleased to present this finished product. This collection name product, made in premium materials, will offer you great function and value for your home, or business for years to come. Please refer to manufacturer websites for additional product details, installation instructions and warranty documents.

We are more than luxury appliances – Monogram is the experience. We’re inspired by life and the way you live it. With high style, superior craftsmanship and award-winning technology, our products raise the bar on what’s possible in your kitchen. Create a kitchen fit for a chef. Push the boundaries on gourmet style for your home. Our appliances rise to every occasion. Induction cooktops, connected ovens, custom-panel refrigerators, Advantium speedcooking ovens, and premium dishwashers blend seamlessly into your dream kitchen. Keep ingredients fresher longer, create masterful meals, and clean up easier – all with impeccable taste to spare. Monogram goes beyond simply cooking and cleaning – we elevate everything.

MONOGRAM

Brand: Monogram
SKU: ZKSB4H4PVSS
Name: Single Door Refrigerator - Statement Handle Kit
Finish: Stainless Steel
UPC: 084691924654

PRODUCT DETAILS

ADDITIONAL PRODUCT INFORMATION

ZKSB4H4PVSS - Monogram

Product: 12560056 We are pleased to present this finished product. This collection name product, made in premium materials, will offer you great function and value for your home, or business for years to come. Please refer to manufacturer websites for additional product details, installation instructions and warranty documents.

We are more than luxury appliances – Monogram is the experience. We’re inspired by life and the way you live it. With high style, superior craftsmanship and award-winning technology, our products raise the bar on what’s possible in your kitchen. Create a kitchen fit for a chef. Push the boundaries on gourmet style for your home. Our appliances rise to every occasion. Induction cooktops, connected ovens, custom-panel refrigerators, Advantium speedcooking ovens, and premium dishwashers blend seamlessly into your dream kitchen. Keep ingredients fresher longer, create masterful meals, and clean up easier – all with impeccable taste to spare. Monogram goes beyond simply cooking and cleaning – we elevate everything.

MONOGRAM 36" ALL GAS PROFESSIONAL RANGE WITH 6 BURNERS

ZGP366NTSS (NATURAL GAS)



BURNER PERFORMANCE

Front Left Burner Element	23,000-BTU
Back Left Burner Element	18,000-BTU
Front Middle Burner Element	15,000-BTU
Back Middle Burner Element	15,000-BTU
Front Right Burner Element	23,000-BTU
Back Right Burner Element	18,000-BTU

VERSATILE GAS BURNER CONFIGURATION

Delivering exceptional cooking flexibility, the two 23,000-BTU multi-ring brass burners and dual-stack burners offer a range of heat settings, from gentle simmer to intense flame

3-PIECE GRATES WITH REVERSIBLE WOK FEATURE

Designed to adapt to different cooking styles, these reversible grates are flat on one side and uniquely contoured on the other to perfectly fit round-bottom woks

WIFI MONITORING AND REMOTE CONTROL WITH THE SMARTHQ™ APP

Perfect for a busy lifestyle, built-in WiFi capabilities allow for the remote activation of cooking functions, like preheating the oven, setting timers, activating Chef Connect and more

DYNAMIC OVEN LCD

Functional and stylish, the LCD shows which oven mode is currently in use and other helpful information, like oven temperature, timer and probe temp

CHEF CONNECT

Stay completely connected with Chef Connect, the smart and convenient feature that can effortlessly synchronize a range of kitchen items such as surface lights and even the vent when the burners are on

INDUSTRY EXCLUSIVE—CUSTOM COLOR LED ACCENT LIGHTING

For an elevated level of luxury, use the SmartHQ™ app to customize the accent lighting color and brightness to perfectly match your kitchen décor or dining ambiance

RING-LIT KNOBS

Delivering a modern approach to customization, the SmartHQ™ app allows for the range knobs to be set in any color you choose, indicating when a burner is on and showing the status of the oven

SOLID BRASS BLADES ON PRECISION MACHINED KNOBS

With an unmatched attention to detail, all knobs on the new Monogram Pro ranges and range tops come with solid brass accents

SEAMLESS STAINLESS TOP FRAME

Meticulously crafted from one piece of stainless steel that covers the cooktop and control panel, this seamless and stylish surface is easy to clean and beautiful to look at

SOFT-CLOSE HINGES

Specially designed, soft-close hinges ensure that the oven door always closes smoothly and quietly for a new level of kitchen refinement

2 OVEN RACKS (FULL-EXTENSION), 1 LOW PROFILE

Oven racks glide smoothly in and out on stainless steel ball bearings for easy access

PRECISION OVEN MODES WITH SMARTHQ APP

Simplify the cooking process with Precision Oven Modes that automatically track progress and make time and temperature adjustments

PRECISE AIR CONVECTION SYSTEM

Designed to optimize air movement in the oven, the convection fan system automatically adjusts airflow—forward or backward—depending on the oven mode being used

For questions about your appliance, please call 1-800-626-2000.

PAGE 1 OF 4

*Natural Gas Model
Product Specification Revised 10/21




SPECIFICATIONS

Overall Width	35 7/8" (91.1 cm)
Overall Height	35 1/4" (89.5 cm)
Overall Depth	28 1/4" (71.6 cm)
Door Clearance	48 1/4" (122.5 cm)
Cutout Width	36" (91.4 cm)
Cutout Height	35 1/4" - 36 3/4" (89.5 - 93.3 cm)
Shipping Weight	462 lbs (209.5 kg)


ATTENTION ELECTRICIAN:

Electrical requirements: Ranges must be hooked up to a 120V, 60Hz properly grounded dedicated circuit protected by a 15-amp circuit breaker or time-delay fuse. See installation instructions for further details.

OVERALL DIMENSIONS

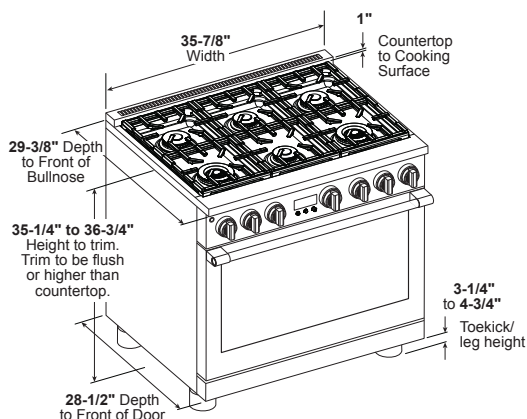


SIDE VIEW WITH A BACKSPLASH

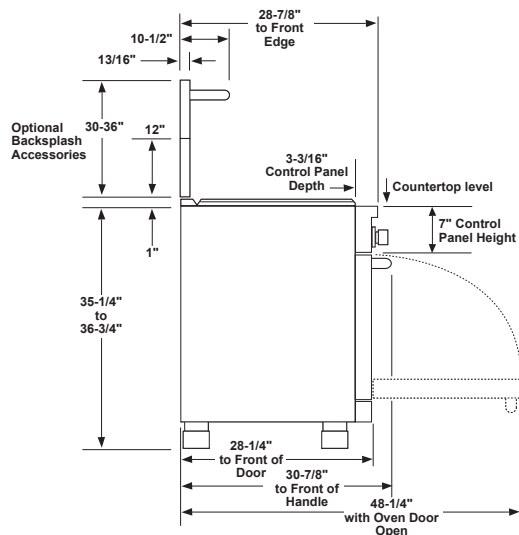

For questions about your appliance, please call 1-800-626-2000.



DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

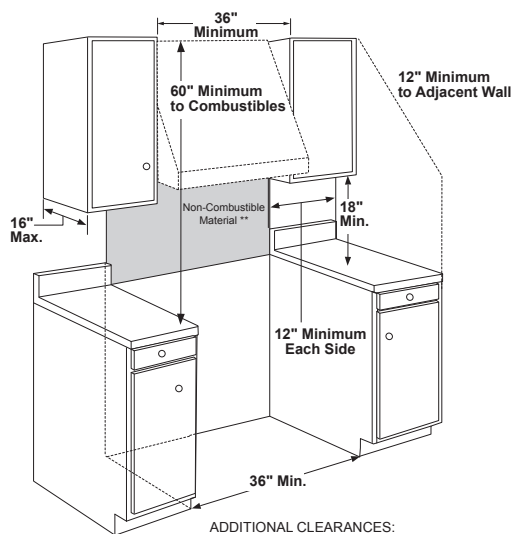

ADDITIONAL CLEARANCES:

Allow 12" minimum clearance to an adjacent wall on each side.

Working areas adjacent to the rangetop should have 18" minimum clearance between countertop and the bottom of the wall cabinet.

** As defined in the National Fuel Gas Code (ANSI Z223.1/CSA B149.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1/CSA 1.1 scope and are not certified by CSA. Clearances less than 12" must be approved by local codes and/or the authority having jurisdiction.

HELPFUL TIPS

All Professional Ranges are factory set for natural gas.

NOTE

A propane conversion kit is included with the range. High Altitude kit for operation above 6,000 feet (for Natural and LP gas models), is available at an additional cost. The conversion must be performed by a qualified gas installer at additional cost.

HA NG Service Kit: WB28X39726

HA LP Service Kit: WB28X39727

INSTALLATION INFORMATION

Before installing, consult installation instructions packed with product or online at Monogram.com for current dimensional data. A suitable overhead vent hood is required for models with a grill and is recommended for all other models.

ADVANCE PLANNING

Refer to dimensional drawings for appropriate placement and necessary clearances when planning the installation.

- Working areas adjacent to the range should have 18" minimum clearance between countertop and cabinet bottom.
- Clearance between range and side wall or combustible material must be at least 12" on each side.
- Installation must conform with local codes. In the absence of local codes, the range must comply with the National Fuel Gas Code, ANSI Z223.1-1990.

⚠ WARNING


Installations without a hood require 60" minimum to combustibles. A custom hood installation with exposed horizontal combustible surfaces must have an Auto-On feature. Refer to hood installation instructions for specific hood clearances.

The surface of the entire back wall above the range and below the hood must be covered with a non-combustible material such as metal, ceramic tile, brick, marble or other stone.




DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

UTILITY LOCATIONS

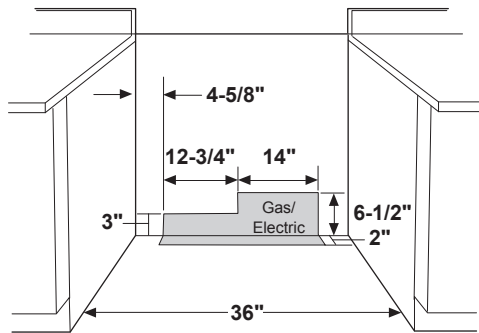

Locate gas and electric as shown

**12" min. to combustibles or 0" to
a non-combustible material above
the cooking surface**

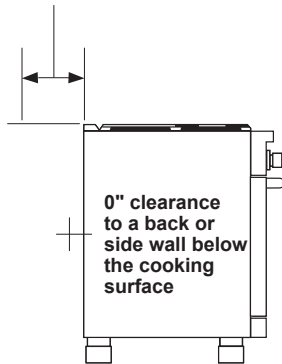

HELPFUL TIPS

GAS PRESSURE REGULATOR

You must use the gas pressure regulator supplied with this rangetop. For proper operations the inlet pressure to the regulator should be as follows:

Natural Gas:

Minimum pressure: 6" of Water Column

Maximum pressure: 13" of Water Column

Propane (LP) Gas:

Minimum pressure: 11" of Water Column

Maximum pressure: 13" of Water Column

See installation instructions for more details

OPTIONAL ACCESSORIES

- UXPRGG – Reversible Griddle/Grill Accessory

OPTIONAL BACKSPLASH ACCESSORIES

- The range requires a 12" minimum clearance to a vertical combustible surface at the rear. A backsplash is required for installations with less than 12" clearance. The following backsplash accessories are available, or a custom, non-combustible backsplash can be used.
- Order one with a 36"-wide range backsplash:
- UX12BS36PSS – 12"-height backsplash
- UXADBS36PSS – 30"-36" adjustable-height backsplash with warming shelf

OPTIONAL STAINLESS STEEL KNOB KITS AVAILABLE

ZXPR36KKTSS – 30" and 36" Range


ZXPR48KKTSS – 48" Range

DESIGNER


VISTA

ISLAND


ZEPHYR
ZEPHYRONLINE.COM

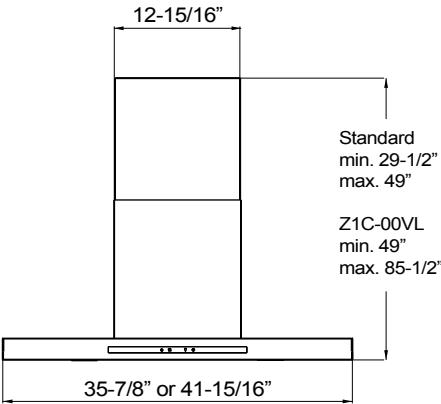

FRONT

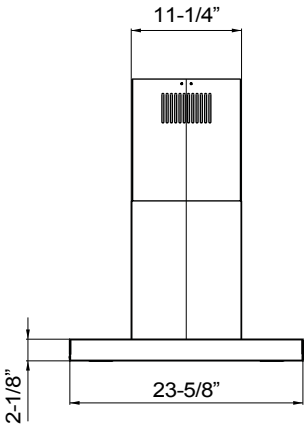

SIDE

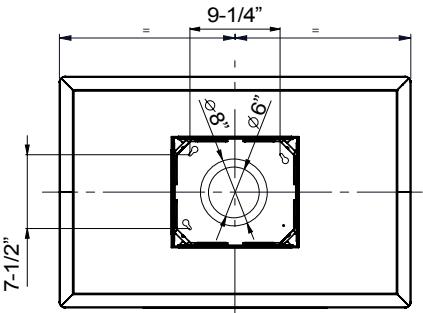

TOP



DESIGNER

VISTA

ISLAND

ZEPHYR
ZEPHYRONLINE.COM

MODEL									
Stainless Steel Size	DVL-E36ASSX 36"	DVL-E42ASSX 42"							
BLOWER PERFORMANCE									
Internal Blower (CBI-290C)*	200-290 CFM, 1.4-3 sones	200-290 CFM, 1.4-3 sones							
Internal Blower (CBI-600A)*	240-600 CFM, 1.8-6 sones	240-600 CFM, 1.8-6 sones							
In-Line Blower (PBN-1000A)*	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA							
External Blower (CBE-1000)*	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA							
FEATURES									
Controls	Invisible Touch	Invisible Touch							
Speed Levels	3	3							
Auto Delay-Off	Yes	Yes							
CleanAir Function**	Yes	Yes							
Lighting	LED, 5W x4	LED, 5W x4							
Tri-Level Lighting	Yes	Yes							
Filters	Aluminum Mesh x3	Aluminum Mesh x3							
Perimeter Aspiration System	Yes	Yes							
Recirculating	Yes	Yes							
Extension Duct Cover Option	Yes, Up to 12' Ceiling	Yes, Up to 12' Ceiling							
ADA Compliant	Yes, with remote option	Yes, with remote option							
DUCT SPECIFICATIONS									
Vertical Single Internal Blower	6" Round	6" Round							
Vertical In-Line/External Blower	10" to 8" Round***	10" to 8" Round***							
Horizontal Single Internal Blower	6" Round	6" Round							
Horizontal In-Line/External Blower	10" to 8" Round***	10" to 8" Round***							
AC POWER									
Hood w/ CBI-290C	120V, 60Hz, Max. 1.1A	120V, 60Hz, Max. 1.1A							
Hood w/ CBI-600A	120V, 60Hz, Max. 3.1A	120V, 60Hz, Max. 3.1A							
Hood w/ PBN-1000A	120V, 60Hz, Max. 5.5A	120V, 60Hz, Max. 5.5A							
Hood w/ CBE-1000	120V, 60Hz, Max. 6.7A	120V, 60Hz, Max. 6.7A							
OPTIONAL ACCESSORIES									
Recirculating Kit	ZRC-00VL	ZRC-00VL							
Remote Control	14000010	14000010							
Duct Cover - Stainless Steel	Z1C-00VL	Z1C-00VL							
Make-Up Air Kit	MUA006A (600 CFM) MUA008A (1,000 CFM)	MUA006A (600 CFM) MUA008A (1,000 CFM)							
MOUNTING HEIGHT RANGE****									
	24" - 36"	24" - 36"							
WARRANTY									
	2 year parts, 1 year labor	2 year parts, 1 year labor							
CEILING HEIGHT		8'	8.5'	9'	9.5'	10'	10.5'	11'	12'
STANDARD DUCT COVER	Ducted Mounting Height*	24" - 35"	24" - 36"	24" - 36"	29" - 36"	35" - 36"	NA	NA	NA
	Recirc Mounting Height*	24" - 30.5"	24" - 36"	24" - 36"	29" - 36"	35" - 36"	NA	NA	NA
EXTENSION DUCT COVER	Ducted Mounting Height*	NA	NA	NA	24" - 29"	24" - 35"	24" - 36"	24" - 36"	25" - 36"
	Recirc Mounting Height*	NA	NA	NA	24" - 24.5"	24" - 30.5"	24" - 36"	24" - 36"	25" - 36"

*Blower sold separately.

**CleanAir turns your hood on once every four hours for 10 minutes on speed one.

***10" round duct connects to external and in-line blower. Must transition from 10" to 8" before duct passes through ceiling. A 10" to 8" adapter is included with external and in-line blowers.

****Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

DID YOU KNOW?

The Perimeter Aspiration System moves airflow away from the central area of the hood and evenly distributes it through narrow openings around the perimeter of the hood. This ventilation method increases air velocity and improves the capture of cooking contaminants.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

MAY21.0101




BLOWER


SPECIFICATIONS




CBE-1000
(external)

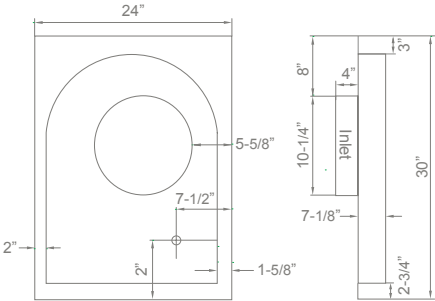

PBN-1000A
(in-line)

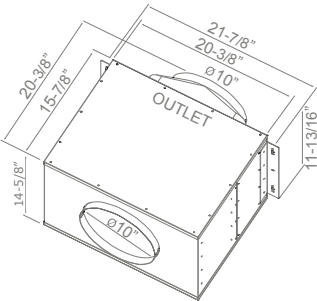

DBI-600A
(internal/in-line)

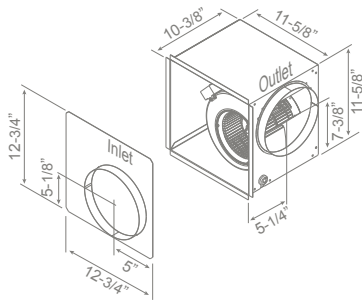


BLOWERS

MODEL	BLOWER TYPE	MAX WATTS*	MAX AMPS*	CFM	SONES	COMPATIBLE MODELS
CBI-290A	Single Internal	77	0.75	200 - 290	1.4 - 3	Designer Collection
CBI-290B	Single Internal	77	0.75	200 - 290	1.4 - 3	AK83
CBI-600A	Single Internal	320	2.75	240 - 600	1.8 - 6	Designer Collection
CBI-600B	Single Internal	320	2.75	240 - 600	1.8 - 6	AK83
DBI-600A	Internal/In-Line	340	3.0	200 - 600	NA	DLI-ExxASX
PBI-1100A	Dual Internal	640	5.45	500 - 1,100	3.5 - 8	AK83, ALU-ExxBxX
PBD-1200A	Dual Internal	660	5.8	400 - 1,200	3.5 - 9	AK70xxBS, AK75xxBS
PBD-1300A	Dual Internal	490	8.0	350 - 1,300	1 - 8	AK76xxAS, AK77xxAS, ZRP-ExxAS
CBE-1000**	External	640	5.45	500 - 1,000	NA	AK83, Designer Collection
PBN-1000A**	In-Line	700	6.25	500 - 1,000	NA	AK83, Designer Collection

*Add blower Watts and Amps to AC Power details from hood spec sheet to determine total power consumption.
 **For Designer Collection and AK83 hoods you must transition from 10" to 8" ducting before duct passes through ceiling. A 10" to 8" adapter is included with external and in-line blowers.
 The exception to this is ALU-ExxBxX which uses a 10" round.

MONOGRAM 24" FULLY INTEGRATED DISHWASHER

ZDT985SPNSS

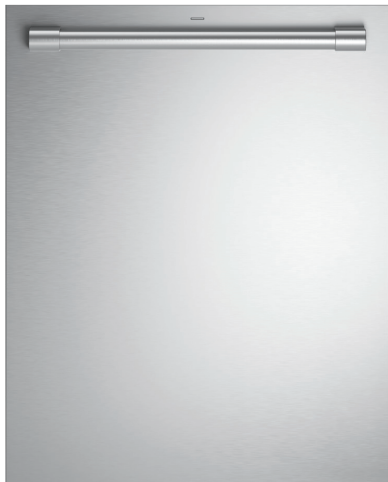

THE MONOGRAM STATEMENT COLLECTION

Polished stainless steel, and hand-finished edges convey a sense of solidity and beauty

ADVANCED WASH SYSTEM

Designed to achieve the ultimate clean, this advanced wash system with over 90 powerful jets delivers complete washing coverage to every corner of the dishwasher

FULL-EXTENSION, ADJUSTABLE THIRD RACK WITH PREMIUM SLIDES

Convenient and adjustable, this expansive third rack easily accommodates an entire flatware collection, plus carving knives, soup ladles and other cooking/serving tools for the ultimate clean

STEAM + SANITIZATION

Eliminate the need to pre-wash dishes at the end of every meal, thanks to a Steam + Sani feature that easily loosens lingering traces of food with an added bonus of complete sanitization, removing 99.999% of bacteria

39 DBA QUIET OPERATION

Is made possible by advancing sound-absorbing materials and a smooth-running motor

HARD FOOD DISPOSER

Designed to maintain a kitchen's cleanliness and efficiency, the hard food disposer with stainless steel blades grinds food into tiny particles that wash away with ease

MAX DRY SYSTEM

This precise and efficient drying system delivers beautifully dry dishes every time and is perfect for hard-to-dry items like your favorite champagne flutes

BOTTLE JETS

Hard-to-reach areas inside tall items get completely clean with four dedicated jets integrated into the upper rack that shower water deep inside for the ultimate clean

LED LIGHTING

Illuminates the entire interior, leaving no question as to whether or not dishes have been cleaned

DEEP CLEAN SILVERWARE JETS

Powerful jets blast away stuck-on food for silverware that's always spotless


FLUSH INSTALLATION CAPABILITY

Enables the dishwasher to be installed flush, even with inset cabinetry, without any additional parts

For questions about your appliance, please call 1-800-626-2000.

PAGE 1 OF 3


Product Specification Revised 4/20

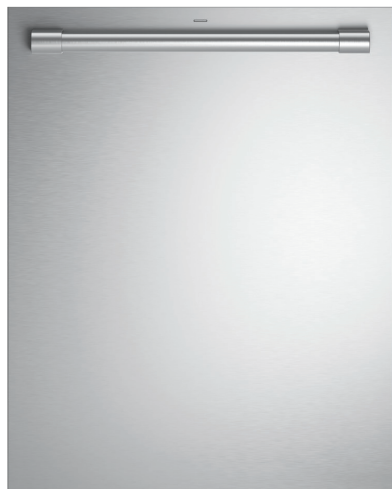

SPECIFICATIONS

Overall Width	23 3/4" (60.3 cm)
Overall Height	33 3/8" (84.8 cm) Min 34 5/8" (88.0 cm) Max
Overall Depth	24" (61 cm)
Door Clearance	25 1/2" (64.8 cm)
Overall Dishwasher Capacity	16 Place Settings
Minimum Cabinet Width	24" (61 cm)
Minimum Cabinet Depth	24" (61 cm)
Cutout Width	24" (61 cm)
Cutout Height	33 1/2" (85.1 cm) Min 34 3/4" (88.3 cm) Max
Electrical Requirements	10.2 A
Hose Length	No more than 12' (3.7 m)
Voltz/Hertz/Amps	115 V, 60 Hz, 15 or 20 amp circuit
Shipping Weight	139 lb (63 kg)

OVERALL DIMENSIONS

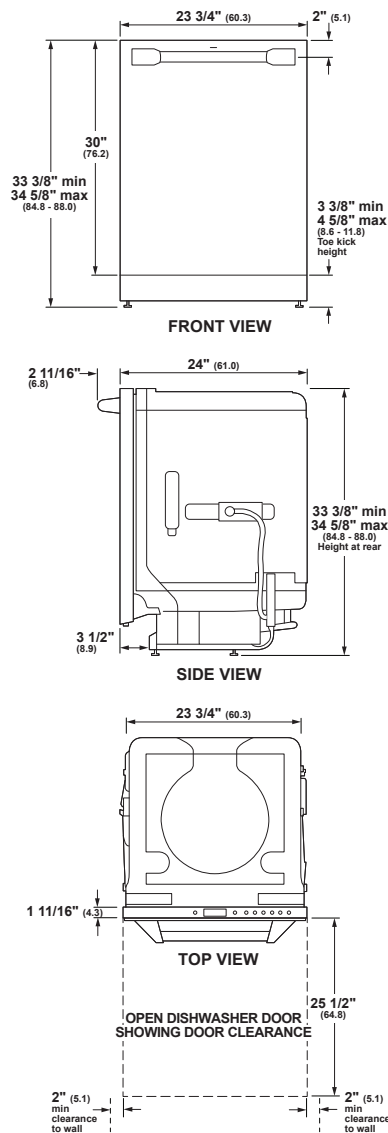


Dimensions in parentheses are in centimeters unless otherwise noted.
Actual product dimensions may vary due to manufacturing tolerances.


For questions about your
appliance, please call 1-800-626-2000.



FLUSH CUTOUT INSTALLATION

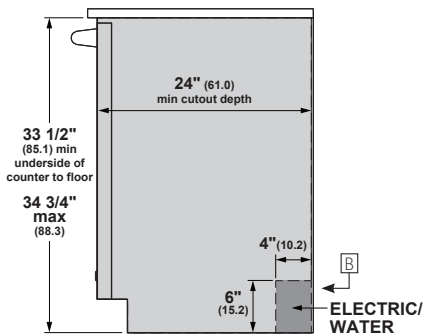

INSTALLATION CUTOUT FRONT VIEW



SPECIAL NOTES

- A The dishwasher drain hose must be no more than 12 feet in length for proper drainage.
- B Electrical connections are at the right front of the dishwasher and water connections are on the left. The hot water line should extend forward 30" to 40" from the rear wall. The electrical must extend forward at least 24" to reach the junction box.
- C To prevent siphoning, an air gap or high drain loop must be used.

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

For questions about your appliance, please call 1-800-626-2000.

MONOGRAM 1.2 CU. FT. DRAWER MICROWAVE

ZWL1126SRSS



SOPHISTICATED STYLING

Offers a look of modern refinement that blends beautifully with both Statement and Minimalist collections

1.2 CU. FT. CAPACITY

Accommodates large plates and cookware with ease

FLUSH INSTALLATION CAPABILITY

Enables the drawer to be installed flush with cabinetry without any additional parts

ELECTRONIC TOUCH CONTROL WITH WHITE LED DISPLAY

Makes it easy to adjust settings and adds to the drawer's sleek, streamlined appearance

SENSOR COOK & SENSOR REHEAT

Microwave sensor cooking automatically adjusts the time and power for delicious results from favorite foods, leftovers and more

1,000 WATTS

Cooking power delivers rapid, even heat

SENSOR COOKING

Automatically adjusts time and power settings for optimal results

ADD 30 SECONDS

Allows you to add 30 seconds of cooking time with a simple touch

CONTROL LOCK FEATURE

Prevents unwanted use for extra peace of mind

EASY ACCESS OPTION

Allow you to open and close the drawer with the push of a button or by gently pulling or pushing the recessed handle

For questions about your appliance,
please call 1-800-626-2000.

PAGE 3 OF 3

Product Specification Revised 2/24



SPECIFICATIONS


Overall Width	23 7/8" (60.6 cm)
Overall Height (Rear)	14 19/32" (37.1 cm)
Overall Height (Front)	15 15/16" (40.5 cm)
Overall Depth	23 5/16" (59.2 cm)
Oven Door Clearance	15" (38.1 cm) Min
Overall Oven Interior Capacity	1.2 cu. ft. (.02 cu. cm)
Oven Interior Dimensions (W x H x D)	17 1/4" x 7 1/8" x 17 1/2" (43.8 cm X 18.1 cm x 44.5)
Minimum Cabinet Width*	23 7/8" (60.6 cm)
Minimum Cabinet Depth*	23 1/2" (59.7 cm)
Minimum Base Support	100 lbs (45.4 kg)
Cutout Width*	22 1/8" (56.2 cm) Min
Cutout Height*	14 13/16" (37.6 cm) Min
Cutout Depth*	23 1/2" (59.7 cm) Min
Volts/Hertz/Amps	120 VAC, 60 Hz
Cord Length	51" (129.5 cm)
Electrical Rating	1.67 kw@120v
Total Amps	15
Shipping Weight	90 lbs (39.4 kg)

*Additional space will be needed for flush installation.

ATTENTION ELECTRICIAN:

A 120VAC, 60Hz, 20 Amp circuit is required. An individual properly grounded branch circuit or circuit breaker is required.

OVERALL DIMENSIONS

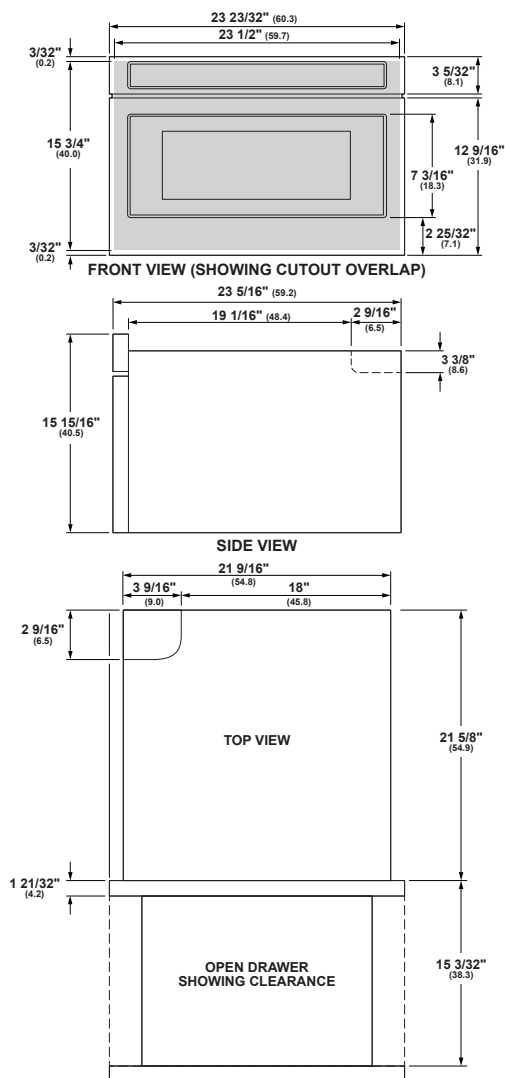


Dimensions in parentheses are in centimeters unless otherwise noted.
Actual product dimensions may vary due to manufacturing tolerances.

For questions about your appliance,
please call 1-800-626-2000.




STANDARD INSTALLATION

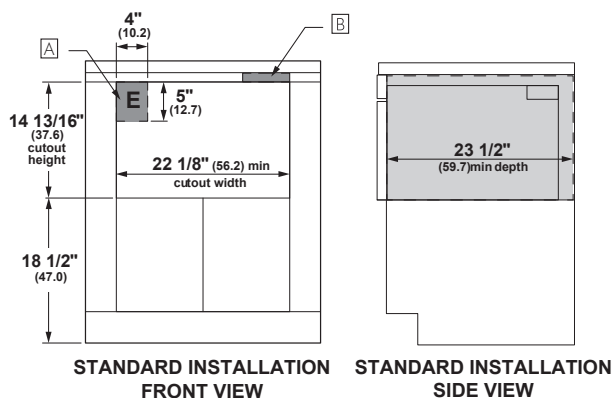

HELPFUL TIPS

- A** Junction box location (May also be located in adjacent cabinet.)
- B** To reduce the risk of tipping of the drawer, the Anti-Tip block must be properly installed located 14-13/16" above the floor on which the Microwave Drawer will sit. The Anti-Tip block must be provided and pre-installed by the purchaser of the product or builder before install can be done. The Anti-Tip block prevents serious injury that might result from spilled hot liquids.
- C** Cleats may be visible and should be finished to match cabinetry.
- D** The face of the shelf must sit 1-7/8" back from the face of the cabinet. See installation instructions for further details including the installation of 24" flush mount deflector vent.

FLUSH INSTALLATION

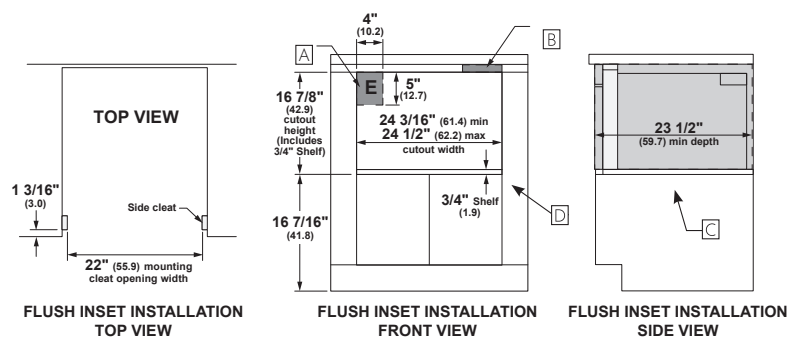

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

For questions about your appliance, please call 1-800-626-2000.

Miele

CVA 7445

Built-in coffee machine with DirectWater

In a perfectly combinable design with patented CupSensor for perfect coffee.



- Large clear text display with sensor controls – DirectSensor
- Perfectly positioned: thanks to the patented CupSensor
- 2 coffees at once at the touch of a button – OneTouch for Two
- Always freshly ground – AromaticSystemFresh
- Convenient when hosting lots of guests – coffee/tea pot function

EAN: 4002516426646 / Material number: 11754300 / Old Material Number: 29744540USA

Construction type and design	
Built-in bean-to-cup coffee machine	•
PureLine	•
Color	Stainless Steel/Clean Touch Steel
Convenience features	
AromaticSystemFresh	•
OneTouch preparation	•
One Touch and OneTouch for Two	•
DoubleShot	•
Programmable User profile	10
Flavor preserving conical grinding unit	•
Grinding grade selectable	•
Ground quantity programmable	•
Water quantity programmable	•
Water temperature programmable	•
Amount of milk can be programmed	•
Amount of milk froth can be programmed	•
Pre-brewing programmable	•
TeaTimer	•
User convenience	
Networking with Miele@home	•
Control panel	DirectSensor
CupSensor	•
Height adjustment of infinitely adjustable central spout min in in.(cm)	1 5/8 (4.0)
Height adjustment of infinitely adjustable central spout max in in.(cm)	6 1/2 (16.5)
PerformanceMode	•
EasyClick milk container	•
DirectWater	•
ComfortDoor	•
Hidden door handle	•
BrilliantLight	•
Expert mode	•
MultiLingua	•
No. of bean types	1
No. of bean containers	2
Bean container capacity, each in oz (g)	300
Capacity of bean container B in g	300
Bean container capacity, total in oz (g)	21.16 (600)
Removable bean container	•
Capacity of water container in fl oz (l)	91.3 (2.7)
Milk container capacity in l	0.7
Capacity of waste container in servings	17
Drip tray capacity in fl oz (l)	54.1 (1.6)
Easily accessible containers	•
Time-of-day display	•
Time synchronization	•
Date display	•
Programmable switch-on time	•

more information you can find here:
<http://www.mieleusa.com>

Miele

CVA 7445

Built-in coffee machine with DirectWater

In a perfectly combinable design with patented CupSensor for perfect coffee.



EAN: 4002516426646 / Material number: 11754300 / Old Material Number: 29744540USA

Programmable switch-off time	•
Programmable stand-by time	•
Individual settings	•
Drink specialties	
Adjustable beverage portion size in ml	20-300
Ristretto, single	•
Ristretto, double	•
Espresso, single	•
Espresso, double	•
Coffee, single	•
Coffee, double	•
Long coffee, single	•
Long coffee, double	•
Cappuccino, single	•
Cappuccino, double	•
Latte macchiato, single	•
Latte macchiato, double	•
Hot milk, single	•
Latte macchiato, double	•
Milk froth, single	•
Milk froth, double	•
Espresso macchiato, single	•
Espresso macchiato, double	•
Cappuccino italiano, single	•
Cappuccino italiano, double	•
Flat white, single	•
Flat white, double	•
Café au lait, single	•
Café au lait, double	•
Caffè latte, single	•
Caffè latte, double	•
Caffè americano, single	•
Caffè Americano, double	•
Long black, single	•
Long black, double	•
Allwater	•
Warm water, double	•
Hot water, single	•
Hot water, double	•
Black tea, single	•
Black tea, double	•
Herbal tea, single	•
Herbal tea, double	•
Fruit tea, single	•
Fruit tea, double	•
Green tea, single	•
Green tea, double	•
White tea, single	•
White tea, double	•
Japanese tea, single	•
Japanese tea, double	•
Chai latte, single	•

The Miele logo, consisting of the word "Miele" in a white, serif font, centered within a red rectangular background.

CVA 7445

Built-in coffee machine with DirectWater


In a perfectly combinable design with patented CupSensor for perfect coffee.

Miele

CVA 7445


Built-in coffee machine with DirectWater

In a perfectly combinable design with patented CupSensor for perfect coffee.




CVA7445, CVA7845, installation drawing, side view, Flush insert


7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel




CVA7440, CVA7445, CVA7840, CVA7845, installation drawing, view from above, 60 cm, Flush inset




CVA7440, CVA7445, CVA7840, CVA7845, installation drawing, view from above, 60 cm, Flush inset

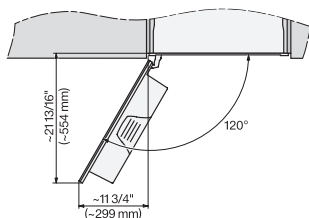


CVA7440, CVA7445, CVA7840, CVA7845, installation drawing, view from above, 60 cm, Flush inset



CVA7440, CVA7445, CVA7840, CVA7845, installation drawing, view from above, 60 cm, Flush inset




CVA7440, CVA7445, CVA7840, CVA7845, installation drawing, view from above, 60 cm, Flush inset




CVA7440, CVA7445, CVA7840, CVA7845, installation drawing, built in, 60 cm, Flush inset

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

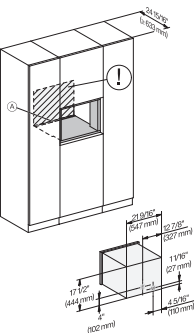

CVA7445, CVA7845, installation drawing, 60 cm, Flush insert

A – Cut-out (1 1/2" x 20" / 38 mm x 508 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection, W = Water connection

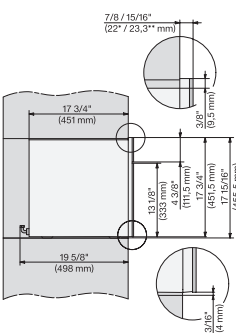

CVA7445, CVA7845, side view, 60 cm, Proud




7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

Miele


CVA 7445

Built-in coffee machine with DirectWater


In a perfectly combinable design with patented CupSensor for perfect coffee.




CVA7440, CVA7445, CVA7840, CVA7845, installation drawing, view from above, 60 cm, Proud




CVA7440, CVA7445, CVA7840, CVA7845, installation drawing, view from above, 60 cm, Proud



CVA7440, CVA7445, CVA7840, CVA7845, installation drawing, view from above, 60 cm, Proud



CVA7440, CVA7445, CVA7840, CVA7845, installation drawing, view from above, 60 cm, Proud

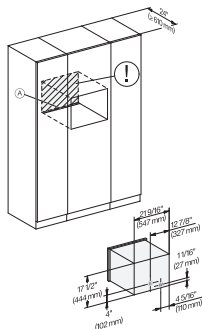

CVA7440, CVA7445, CVA7840, CVA7845, installation drawing, view from above, 60 cm, Proud

CVA7440, CVA7445, CVA7840, CVA7845, installation drawing, built in, Einbau, 60 cm, Proud

CVA7445, CVA7845, installation drawing, installation, 60 cm, Proud

A – Cut-out (1 1/2" x 20" / 38 mm x 508 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection, W = Water connection



HOME APPLIANCES

LG LAUNDRY

Single Unit LG WashTower™ with Center Control™
4.5 cu. ft. Front Load Washer and 7.4 cu. ft. Dryer

AVAILABLE COLORS



KEY FEATURES

Ultra Large Capacity 4.5 cu.ft. Washer and 7.4 cu.ft. Dryer
Single Unit WashTower™ Design
Built-In Intelligence - AI Fabric Sensors/Smart Learner/Smart Pairing™
Advanced Washing & Drying - TurboWash™ 360°/Allergiene™ wash cycle/
TurboSteam™
ThinQ® Technology / Proactive Customer Care
Tempered Glass Door

SMART APPLIANCE

Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle

LG ThinQ™

PRODUCT FEATURES

SUMMARY	Washer	Dryer
Type	Front Load Washer	Front Load Dryer
Capacity (cu.ft.)	4.5 cu. ft.	7.4 cu. ft.
Color	Black Steel (B), White (W)	
APPEARANCE	Washer	Dryer
Hard Buttons		Yes
Touch Buttons		Yes
Full Touch Electronic Control Panel with LED Display		Yes
Unified Center Control	Yes	
Reversible Door	No	
ENERGY	Washer	Dryer
ENERGY STAR® Qualified	Yes	
CEE Tier	Tier2	-
IMEF	2.92	-
IWF	2.9	-
CEF	-	Electric: 3.94 Gas: 3.49
PROGRAMS	Washer	Dryer
No. of Programs	6	6
	Normal, Bedding, Delicates, Heavy Duty, Speed Wash, Downloaded	Normal, Bedding, Delicates, Heavy Duty, Speed Wash, Downloaded
OPTIONS	Washer	Dryer
No. of Options	10	9
	TurboWash®, Steam, Extra Rinse, Pre-wash, Sanitary, Tub Clean, Drum Light, Child Lock, Signal, Wi-Fi / Remote Start	Wrinkle Care, TurboSteam™, Reduce Static, Energy Saver, Steam Fresh®, Drum Light*, Child Lock*, Signal*, Wi-Fi* / Remote Start*
DETAILS	Washer	Dryer
No. of Wash/Rinse Temps	5	-
Wash/Rinse Temps	Hot, Warm/Hot, Warm, Cold/Warm, Cold	-
No. of Spin Speeds	5	-
Spin Speeds	High, Medium/High, Medium, Low, No Spin	-
Max RPM	1300	-
Water Levels	Load Sensing	-
No. of Soil Levels	5	-
Temperature Settings	-	High, Medium/High, Medium, Low/Medium, Low

Drying Levels	-	Very, More, Normal, Less, Damp
Manual Dry Times	-	60 min., 50 min., 40 min., 30 min., 20 min.
FABRIC CARE FEATURES	Washer	Dryer
AI DD	Yes	-
TurboWash™ 360 Technology	Yes	-
Steam Technology	Yes	-
Allergiene™ Cycle	Yes	-
Sanitary Cycle	Yes	-
SenseClean™ System	Yes	-
AI Dry	-	Yes
Sensor Dry	-	Yes
Precise Temperature Control with Variable Heater	-	Yes
Steam Technology	-	Yes (TurboSteam™)
CONVENIENCE FEATURES	Washer	Dryer
TrueBalance™ Anti-Vibration System	Yes	-
	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener	-
4 Tray Dispenser		-
LoDecibel™ Quiet Operation	Yes	-
End of Cycle Signal	Yes	-
LoadSense	Yes	-
Child Lock	Yes	-
Auto Suds Removal	Yes	-
Leveling Legs	4 Adjustable Legs	-
Easy Loading TilTub™	Yes	-
Drum Light	Yes	-
Remaining Time Display/Status Indicator(s)	Yes	-
3 Minute Installation Check	-	Yes
LoDecibel™ Quiet Operation	-	Yes
End of Cycle Signal	-	Yes
Drum Light	-	Yes
FlowSense™ Duct Clogging Indicator	-	Yes
Wrinkle Care Option	-	Yes
Child Lock	-	Yes
		Electric: 3 Way Venting / Gas: 2 Way Venting
Venting Option	-	Yes
4 Adjustable Legs	-	Yes
Remaining Time Display/Status Indicator(s)	-	Yes

ThinQ® TECHNOLOGY	Washer	Dryer
SmartDiagnosis™ (v3.0)	Yes	
Wi-Fi		Yes
Remote Start and Cycle Monitor		Yes
Energy Monitoring		Yes
Tub Clean Coach	Yes	-
MOTOR AND AGITATOR	Washer	Dryer
Motor Type	Inverter Direct Drive	-
Axis	Horizontal	-
MATERIALS AND FINISHES	Washer	Dryer
NeveRust™ Stainless Steel Drum	Yes	-
Cabinet	PCM	-
Control Panel	Plastic	-
Top Plate	Painted	-
NeveRust™ Stainless Steel Drum	-	Yes
Tub Rear	-	Painted
CERTIFICATION	Washer	Dryer
AAFA	Yes	-
POWER SOURCE	Washer	Dryer
Ratings	UL Listed	-
Electrical Requirements	120V, 10 Amps	-
Type	Electric	-
Ratings	-	CSA Listed 120V, 15 Amps (Gas) 240V 30 Amps (Electric)
Electrical Requirements	-	-
Type	-	Gas / Electric
BTU Rating	-	10,000 Feet
LP Conversion Kit	-	383EEL3002D
Side Venting Kit	-	383EEL9001B
DIMENSIONS	Washer	Dryer
Product (WxHxD)	27" x 74 3/8" x 30 3/8"	
Depth with Door Open		55" D with door open
Carton (WxHxD)		30 1/16" x 79 11/32" x 32"
Weight (Product/Carton)		Electric: (326 lb / 361 lb) Gas: (329 lb / 364 lb)
LIMITED WARRANTY	Washer	Dryer
Parts and Labor	1 Year	1 Year
Direct Drive Motor	10 Years	-
Drum	3 Years	3 Years
UPC CODES		
WKEK200HBA (Black Steel)	048231028486	
WKGX201HBA (Black Steel)	048231029254	
WKEK200HWA (White)	048231028462	
WKGX201HWA (White)	048231029261	

© 2020 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 10/19/20